



Karndean
Designflooring



2Degrees
Retail case study



Karndean recognises that when refitting retail stores, minimising disruption to sales is of paramount importance. Our Korlok range can be fitted quickly during closing hours. Its flexible format also facilitates partial area refitting if that suits a store's operations - a major advantage over flooring supplied in sheets or rolls. Lighter than traditional wood, stone and ceramic flooring, there are fewer health and safety implications for installing Karndean. Our tiles and planks are also quicker to install than their natural counterparts.

"We found Korlok by Karndean Designflooring incredibly easy to work with! We were really impressed with how speedy it was to do the installation. Due to the quick and easy drop and lock installation method, our installers picked up the process straight away. We also found Korlok to be extremely durable and resilient as it withstood the wear and tear during the completion of the build."


Texas White Ash RKP8105 is a light-tone board, ideal for stylish interiors. The only enhancements made to the original wood plank were to allow the coveted, neutral tones to come through more prevalently. The straight-grain detailing adds a crisp, clean finish to any interior.

Our Korlok range features proprietary K-Core technology, a 5G® locking mechanism and a specially formulated acoustic backing. Together these layers form a product that is strong and stable, and able to be installed quickly and easily over most existing hard floors, as well as over imperfect subfloors. Korlok offers impressive acoustic benefits in reducing noise transfer to rooms below.

Sector: Retail
Client: 2Degrees (<https://www.2degrees.nz/>)
Specifier Spacewords Interior Architecture
Location: 47 George Street, Newmarket, Auckland, NZ
Area: 200sqm
Product used: Korlok Texas White Ash RKP8105
Photographer: Mark Scowen Photography




Focus on style

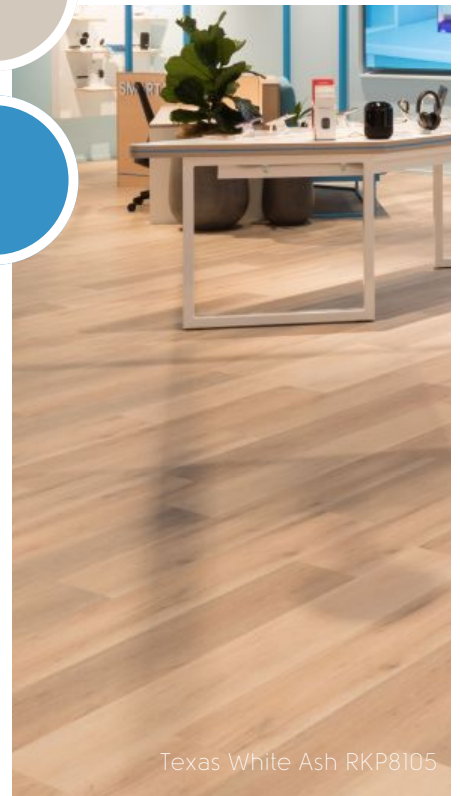

Texas White Ash RKP8105

Why choose a rigid core floor?

Our rigid core hybrid ranges feature a click-locking system that allows them to be installed over most existing hard floors, quickly, easily, and without the need for adhesive ensuring minimal downtime in any project.

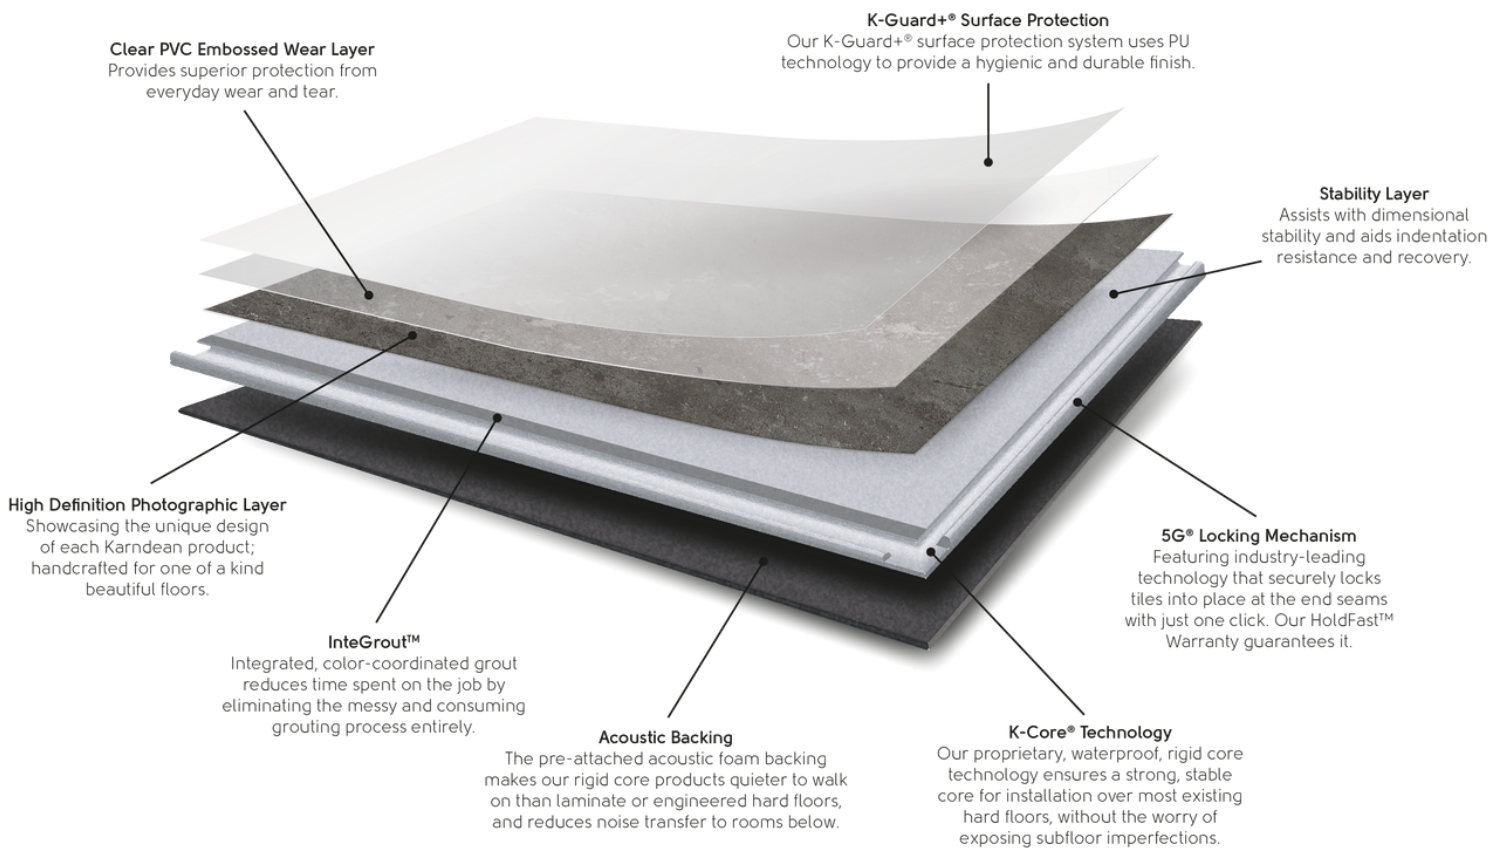


The benefits of Karndean Rigid core



Click-locking mechanism

Planks and tiles are securely locked into place at the end seams with just one easy click.




Quick and easy to install

Our rigid core floors are installed without the need for adhesive, ensuring minimal downtime.



Reduces noise transfer

Our loose lay ranges are perfect for projects where you want to reduce noise levels in the room below, such as playrooms, bedrooms and garage/ loft conversions without the need for underlay.



Installs over most existing hard floors

All you need is a sound, smooth and dry hard surface. Our rigid core ranges can be fitted over most existing hard floors.

With all the added benefits of Karndean luxury vinyl flooring...



Realistic designs



Durable



Low maintenance



Comfort



Environmentally friendly



Hygienic



Warranty*



Pebble Grey RKT2410



Stained Acacia RKP8213

*Lifetime 35 years residential and up to 20 years commercial

Alternative designs

Create the same look for your commercial project.

We have a variety of products to match, within our ranges.



Loose lay



Ashland LLP95



Pearl Oak LLP306



Champagne Oak LLP310



Rigid core



Nordic Limed Oak SCB-KP153



Blush Oak SCB-VGW107T



Frosted Acacia RKP8201



Gluedown



White Painted Oak KP105-7



Millstone Sycamore VGW133T



Columba WP422

Formats

We offer three types of product formats: Loose lay, rigid core and gluedown.

Loose lay




Karndean LooseLay features our K-Wave® friction grip backing which helps hold the product to the subfloor without adhesive, making it quick and easy to install. Ideal for underfloor access panels and temporary roomsets, each plank can be lifted individually where required.

LooseLay Originals

1050 x 250mm plank, 500 x 610mm tile

LooseLay Longboard

1500 x 250mm plank

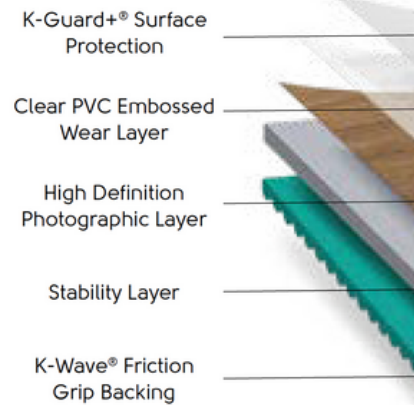

Rigid core



Our rigid core ranges are ideal for installations where acoustics, uneven subfloors or preservation of existing hard floors need to be considered. A click-locking mechanism allows for quick installation and the preattached backing eliminates the need for a separate underlayment.

Korlok


1420 x 225mm plank, 457 x 600mm tile

Van Gogh

1220 x 180mm plank

Knight Tile

1220 x 180mm plank, 305 x 457mm tile

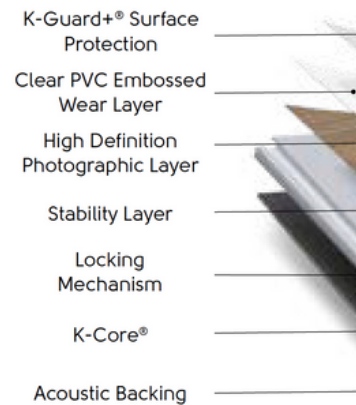

Gluedown



Our gluedown ranges offer our widest choice of colours and formats. Features such as textured emboss or our premium handscraped finish, wide bevels or flat edges make each range unique to Karndean Designflooring.

Art Select

228 x 76mm, 915 x 152mm, 1219 x 178mm plank

Van Gogh


1219 x 178mm plank

Opus

915 x 152mm, 1219 x 228mm plank, 457 x 610mm tile

Knight Tile

1219 x 178mm plank, 305 x 305mm, 305 x 457mm tile

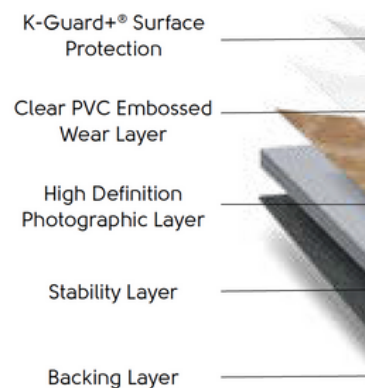

Visit us online at karndean.com where you can...

Find website support

The website offers a wealth of inspiration, case studies and design ideas, detailed technical information and a look inside our head office and warehouse. When you are designing floors this is your point of reference for information, samples and practical support.

Website tools include:

Product Selector	Installation guidelines
Digital Specification Library	Order samples
Technical data	Brochures
Sector application	BIM files



Order samples

If you need some extra help selecting the best colour for your project, why not order some cutting samples? These are small swatch samples designed to help you pick which product is right for you.

www.karndean.com/commercialsamples



[Samples](#)



Check out our Digital Specification Library

We have developed a great tool which allows you to pick a room or upload a photo of your space and see what different floors will look like. It's really easy to use and will allow you to create your perfect Designflooring combination.

www.karndean.com/digitalspecificationlibrary



Sign up for our e-newsletter

We'd love to keep in touch with you. To receive our latest Karndean updates including design, technical data and BIM files, sign up online today at www.karndean.com

Keep up-to-date with us

Follow us on our social media channels.

 Karndean Designflooring ANZ

 karndean_anz

 karndean_anz

 Karndean_anz

 KarndeanDesignFloors



Technical datasheets, Installation guidelines & BIMstore files

Please follow the below QR code links to our technical datasheets, installation guidelines & BIMstore files.

Our Ranges



[Technical datasheets](#)




[Installation Guidelines](#)

bimstore






[BIMstore files](#)

Product specified:



Korlok



	Standard	Result
 Size		1420 x 225 mm
 Thickness		6.5 mm
 Wear layer		0.5 mm
Guarantee	Commercial Residential	15 years wear* Lifetime wear*
Slip resistance	AS/NZ4586	R10

* Subject to terms. [View our guarantee](#)

See Technical Data Sheet via the QR code above for full specification



Imagery and Design Reproduction

Photography and print cannot always produce a perfect representation of our products. This includes colour, pattern variation and installation elements used. For this reason we strongly recommend obtaining a product sample and where possible viewing a larger sample in-store. We also recommend visiting our website for information on installation, after care and product selection: www.karndean.com/advice. We love developing new ideas and improving on our existing designs which means that sometimes products are withdrawn at short notice. We hate to disappoint and will work with you to find an alternative design. Please contact Customer Service for more information.

Contact us

Phone: AUS - 1800 331 170* / NZ - 0800 442 101*

Email: customerservice@karndean.com.au
customerservice@karndean.co.nz

Web: www.karndean.com

Address: 835 Stud Road Knoxfield,
Victoria 3180, Australia

*Calls may be recorded for training and quality purposes.



Karndean
Designflooring

